

FIXED BARRIER SHOWN




FREE STANDING BARRIER SHOWN

- SURFACE OR COUNTER MOUNTING:**
- 1. **FIXED BARRIER (SEE SHEET 2):**
VHB TAPE, ACRYLIC ADHESIVE (SUPPLIED) -OR-
#10 SCREW, QTY: 4 (NOT SUPPLIED).
 - 2. **FREE STANDING BARRIER (SEE SHEET 3):**
LEFT AND RIGHT LEG MOUNTED ON CUSTOMER SIDE (SUPPLIED).
NOTE THAT THIS REQUIRES 4" MIN CLEARANCE ON CUSTOMER SIDE.
 - 3. ASSEMBLY REQUIRED.
 - 4. APPROXIMATE WEIGHT:
7.55 lbs. FIXED BARRIER
8.94 lbs. FREE STANDING BARRIER

KENDALL HOWARD CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENDALL HOWARD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENDALL HOWARD IS STRICTLY PROHIBITED.					UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONAL: $\pm 1/8$ ANGULAR: $\pm 1^\circ$ TWO PLACE DECIMAL: $\pm .03$ THREE PLACE DECIMAL: $\pm .010$ HOLE: $\pm .005$		APPROVAL DRAWN BS 05/06/2020 DESIGN RH 05/07/2020 ENG APPR MFG APPR		DATE 05/06/2020 05/07/2020		KENDALL HOWARD	
MANUFACTURING COMMENTS: Product data					MATERIAL: NA		LEGACY Part Number:		TITLE: PRODUCT DATA- 36X18 BARRIER			
					SURFACE AREA (in²): NA		CLASSIFICATION: Barriers		SIZE A		DWG. NO. SB-AC-3618	
					FINISH ID: NA		THIRD ANGLE PROJECTION		INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009		REV 01	
					FINISH DESCRIPTION: NA				SCALE: 1:10		WEIGHT (lbs): 7.55	
					DO NOT SCALE DRAWING				SHEET 1 OF 3			

NA	INITIAL RELEASE.	BS	05/07/2020	BS
ECO No:	Description:	By:	Date:	App By:

FIXED BARRIER SHOWN

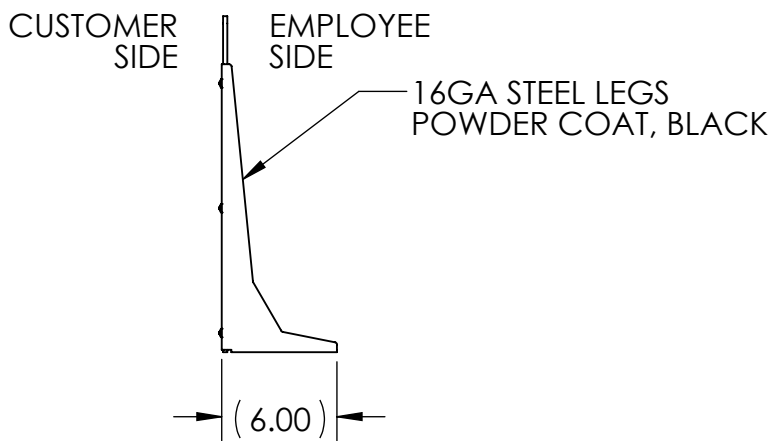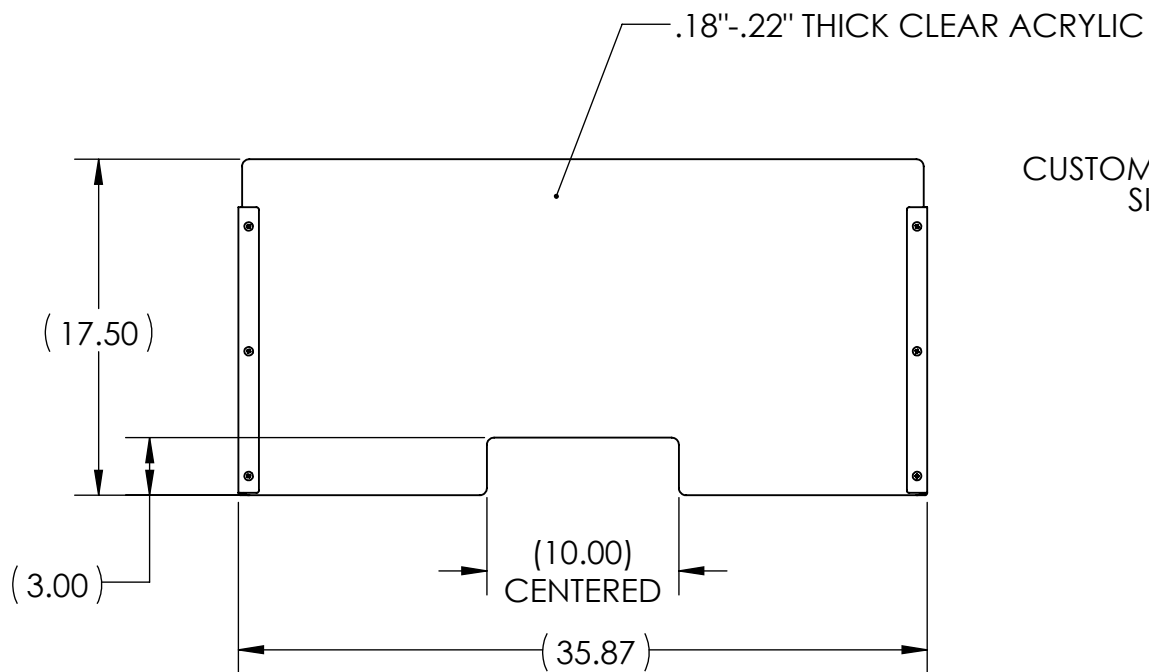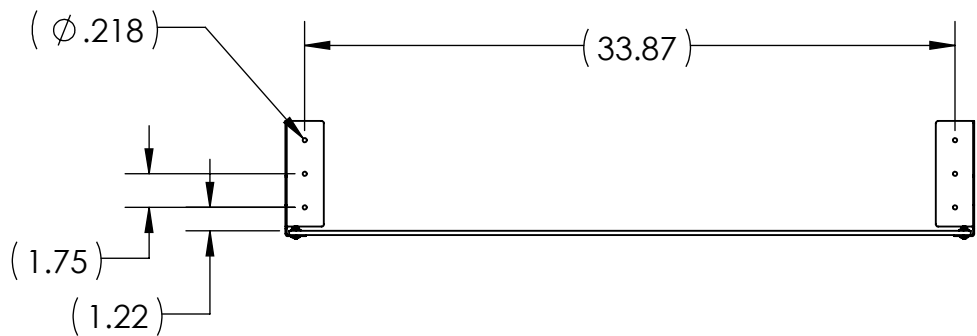

KENDALL HOWARD




SIZE	DWG. NO.	REV
A	SB-AC-3618	01
PRODUCT DATA		

SCALE: 1:8	WEIGHT (lbs): 7.55	SHEET 2 OF 3
------------	--------------------	--------------

THIRD ANGLE PROJECTION


INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009

FREE STANDING BARRIER SHOWN

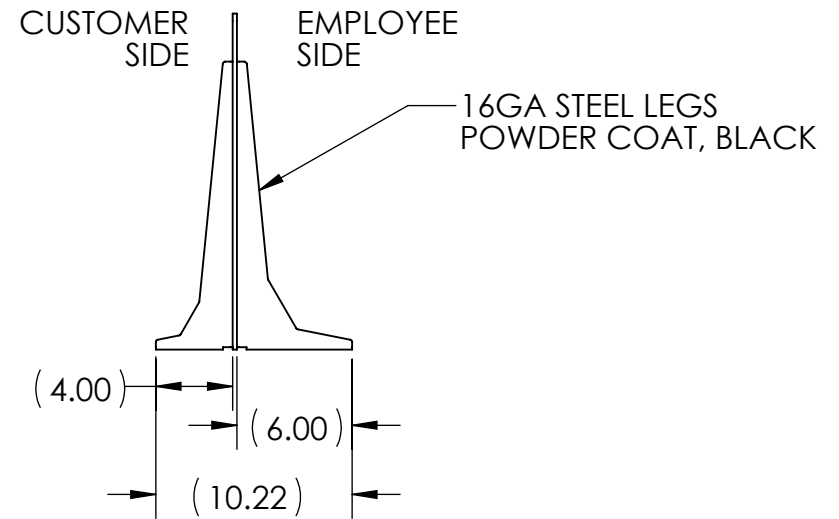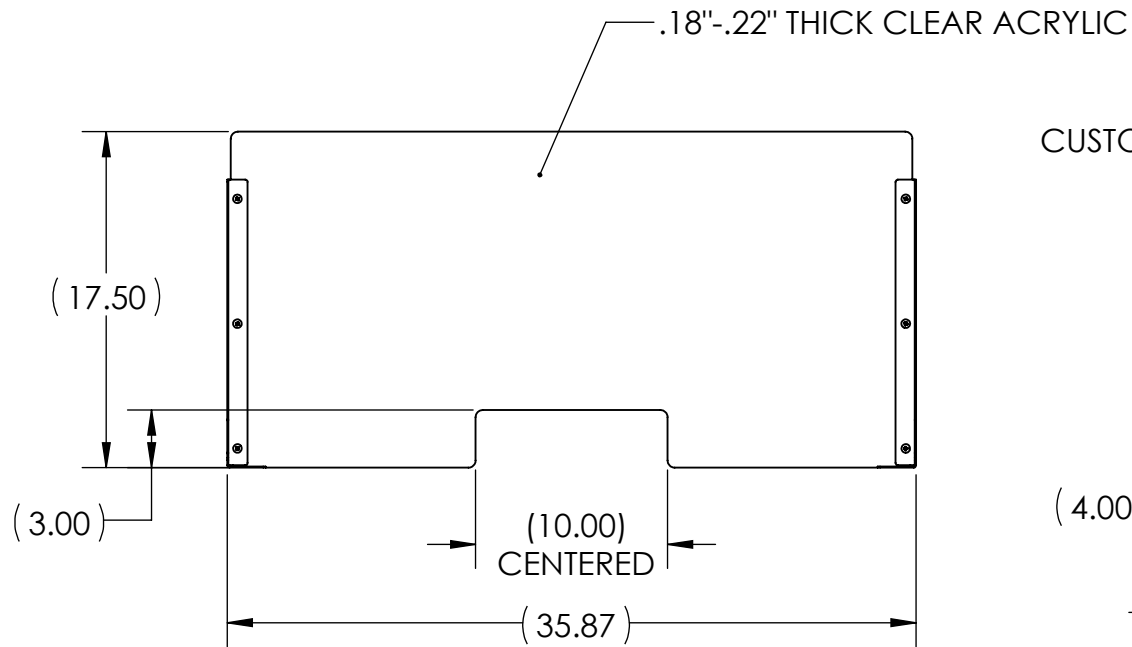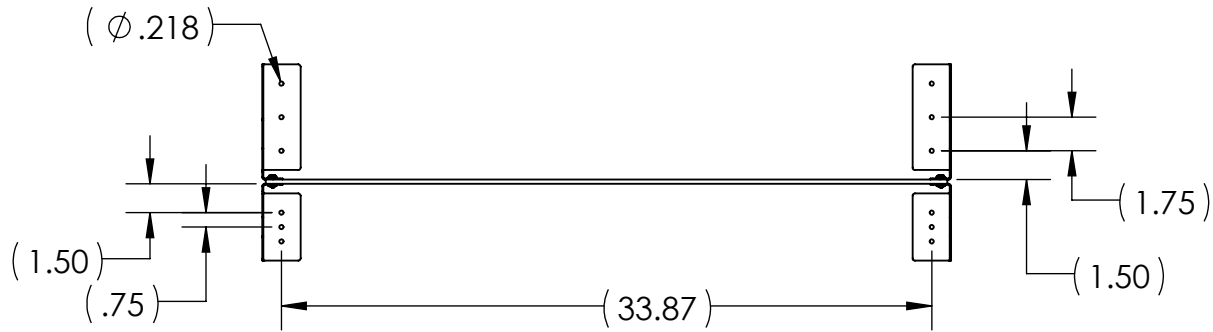

KENDALL HOWARD

SIZE	DWG. NO.	REV
A	SB-AC-3618	01
PRODUCT DATA		
SCALE: 1:10	WEIGHT (lbs): 7.55	SHEET 3 OF 3



INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009