

5

4

3

2

1

D

C

B

A

D

C

B

A

FIXED BARRIER SHOWN

FREE STANDING BARRIER SHOWN

SURFACE OR COUNTER MOUNTING:

1. **FIXED BARRIER (SEE SHEET 2):**
VHB TAPE, ACRYLIC ADHESIVE (SUPPLIED) -OR-
#10 SCREW, QTY: 4 (NOT SUPPLIED).
2. **FREE STANDING BARRIER (SEE SHEET 3):**
LEFT AND RIGHT LEG MOUNTED ON CUSTOMER SIDE (SUPPLIED).
NOTE THAT THIS REQUIRES 4" MIN CLEARANCE ON CUSTOMER SIDE.
3. ASSEMBLY REQUIRED.
4. APPROXIMATE WEIGHT:
9.55 lbs. FIXED BARRIER
10.95 lbs. FREE STANDING BARRIER

KENDALL HOWARD CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
KENDALL HOWARD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF KENDALL HOWARD
IS STRICTLY PROHIBITED.

MANUFACTURING COMMENTS:
Product data**UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE IN INCHES.**

TOLERANCES:
FRACTIONAL: $\pm 1/8$
ANGULAR: $\pm 1^\circ$
TWO PLACE DECIMAL: $\pm .03$
THREE PLACE DECIMAL: $\pm .010$
HOLE: $\pm .005$

MATERIAL: NA**SURFACE AREA (in²):** NA**FINISH ID:** NA**FINISH DESCRIPTION:**
NA

DO NOT SCALE DRAWING


APPROVAL**DATE**

DRAWN BS 05/06/2020

DESIGN RH 05/07/2020

ENG APPR

MFG APPR

LEGACY Part Number:**CLASSIFICATION:**
BarriersINTERPRET DIMENSIONS
AND TOLERANCES PER
ASME Y14.5-2009**KENDALL HOWARD**

TITLE:

PRODUCT DATA- 48X18 BARRIER

SIZE

DWG. NO.

REV

A **SB-AC-48X18**
PRODUCT DATA**01**

SCALE: 1:10

WEIGHT (lbs): 9.55

SHEET 1 OF 3

NA INITIAL RELEASE. BS 05/07/2020 BS

ECO No: Description: By: Date: App By:

5



4

3

2


1

FIXED BARRIER SHOWN

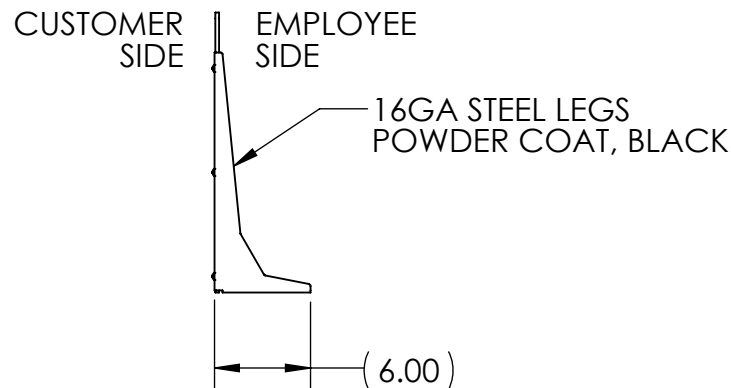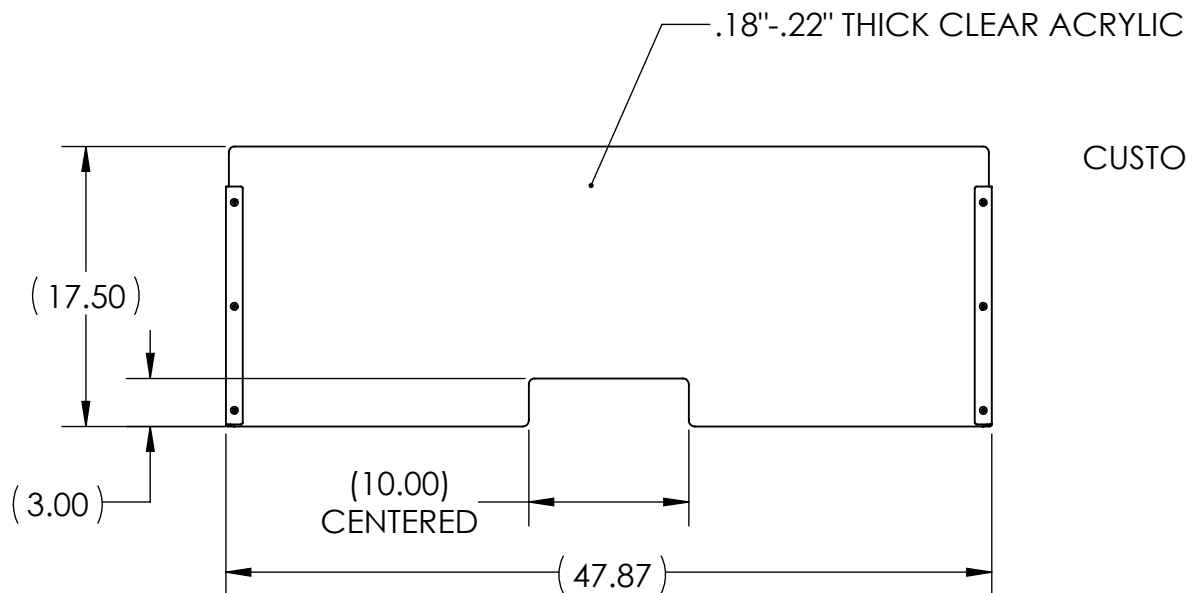




KENDALL HOWARD

SIZE	DWG. NO.	REV
A	SB-AC-48X18	01
PRODUCT DATA		
SCALE: 1:12	WEIGHT (lbs): 9.55	SHEET 2 OF 3



INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009


FREE STANDING BARRIER SHOWN

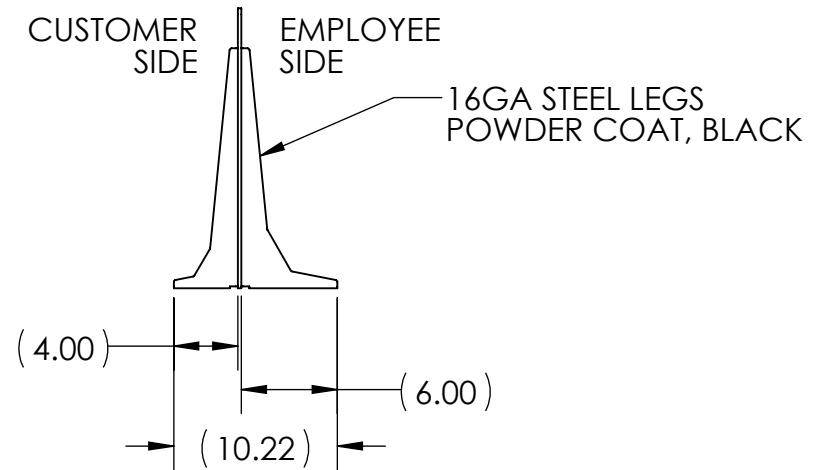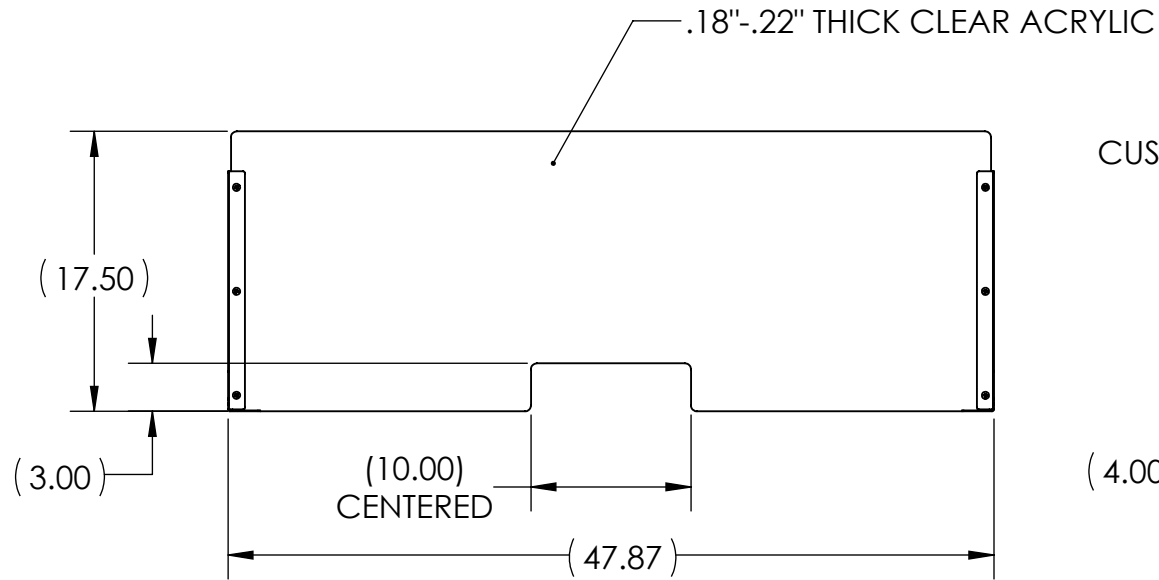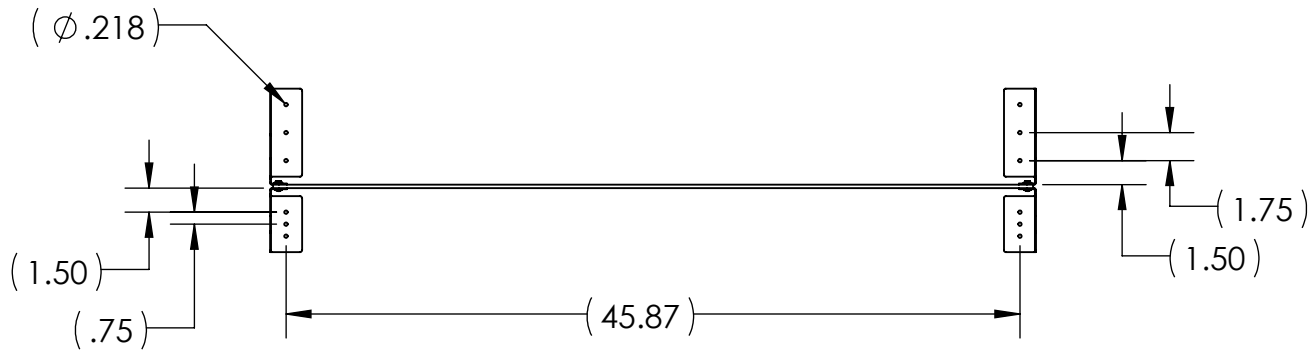

KENDALL HOWARD

SIZE A	DWG. NO. SB-AC-48X18	REV 01
PRODUCT DATA		

SCALE: 1:12	WEIGHT (lbs): 9.55	SHEET 3 OF 3
-------------	--------------------	--------------



INTERPRET DIMENSIONS
AND TOLERANCES PER
ASME Y14.5-2009